

Display Switch Panel


QUICK START GUIDE

This light commercial vehicle is fitted with Modul-Connect from Modul-System.

Modul-Connect is an innovative wiring and control system, which enables you to control the vehicle's auxiliary electrical items.

This quick start guide explains how to use the Display Switch Panel (DSP).

1. OLED Display
2. Navigation buttons
3. Accessory switching buttons

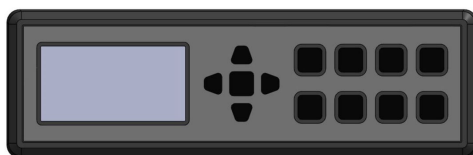

1 2 3

The five Navigation buttons are: Up, Down, Left, Right and the centre one is Select. The Accessory switching Buttons turn On and Off the icon functions assigned to them.

The DSP is an intuitive, functional switch panel which will vary on functionality depending on vehicle specification. The DSP may have more or less functionality than listed.

Full operational instructions and installation instructions can be downloaded from www.modul-system.com



The Display will show supplying Battery voltage, Main Box Internal PCB temperature and vehicle weighing (if fitted). It will also show any error messages, i.e. blown fuses or when Battery Guard parameters are met on the Modul-Connect System.


The DSP will Sleep if there is no input or Ignition signal for 60 seconds to conserve battery power. Any switch input, or turning on the vehicle ignition, will wake the DSP up again.

To change between displays, use the five Navigation Buttons, Up, Down, Right, Left. Use the Centre button to Select.

The DSP Settings should not need to be changed in normal use.

To select the DSP SETTINGS, hold down the Select button for 4 seconds. The display will revert back if no buttons are pressed for 15 seconds or if the Select button is pressed for 4 seconds.

The DSP SETTINGS menu will look like this:





A box around the icon is the selection and can be moved with the Right and Left Navigation Buttons. There are currently 4 options:



1. Information – Shows the current DSP firmware versions.




2. Navigation Button Key Sound – Speaker symbol ON - Strikethrough Off.



3. Overweight Alarm - Bell symbol ON - Strikethrough Off (available with Modul-Connect on-board vehicle weighing system).



4. Programming Mode – When selected the DSP will go into Programming Mode. A setup feature which should only be selected by a Modul-System Technician.



To exit this Function, hold down the Select button for 4 seconds.

Service and contact information:

Email: service@modul-system.co.uk

Email: modul-connect@modul-system.co.uk

